



Robotics Programming Laboratory

Bertrand Meyer
Jiwon Shin

Lecture 2: ROS and Roboscoop

Robots of today



- Many sensors and actuators
- Able to operate in familiar or expected environments
- Able to perform specialized tasks

Robots of the future



C-3PO

- Provides etiquette, customs, and translation assistance
- Has own thoughts and feelings

R2-D2

- Rescues people and robots
- Repairs other robots and complex hardware and software

Advanced robots must be able to operate and perform tasks in complex, unknown environments.

As robotics advances, we must be aware that robots can be both helpful and harmful.






Advanced robotic systems have many hardware components that can operate concurrently.

- Sensors and actuators can run in parallel.
- Locomotion and manipulators can run concurrently.


Concurrency in robotics



Multiprocessing, parallelism

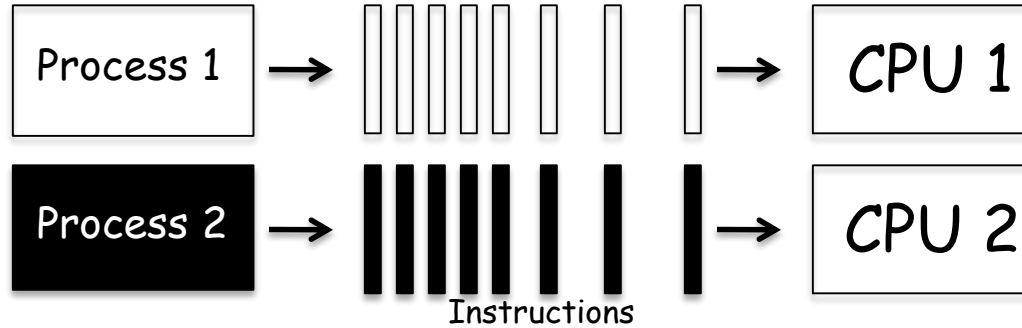

- **Multiprocessing**: the use of more than one processing unit in a system
- **Parallel execution**: processes running at the same time

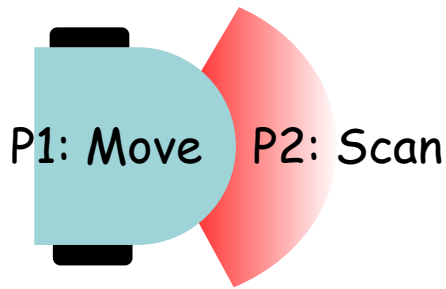



Benefits of introducing concurrency into programs:

- **Efficiency:** time (load sharing), cost (resource sharing)
- **Availability:** multiple access
- **Convenience:** perform several tasks at once
- **Modeling power:** describe systems that are inherently parallel



Concurrency framework for robotics



Roboscoop

- Library (set of primitives and tools for their coordination)
- Integration with other robotics frameworks
- External calls

SCOOP

- O-O Structure
- Coordination
- Concurrency

ROS

- Communication
- Navigation, image processing, coordinate transforms, visualization, ...



ROS: Open-source, meta-operating system for robots

ROS provides the services of an operating system, including

- hardware abstraction,
- low-level device control,
- implementation of commonly-used functionality,
- message-passing between processes, and
- package management

Quigley, M., et al. "ROS: an open-source Robot Operating System," IEEE International Conference on Robotics and Automation. 2009.

<http://www.ros.org>




Goals of ROS

- Support code *reuse* in robotics research and development.
- Enable executables to be individually designed and loosely coupled at runtime through its distributed framework of processes.
- Group processes for easy sharing and distribution.
- Enable the distribution of collaboration through its repositories.

Properties of ROS

- Thin
- Peer-to-Peer
- Multi-lingual: C++, Python, Lisp

ROS communication

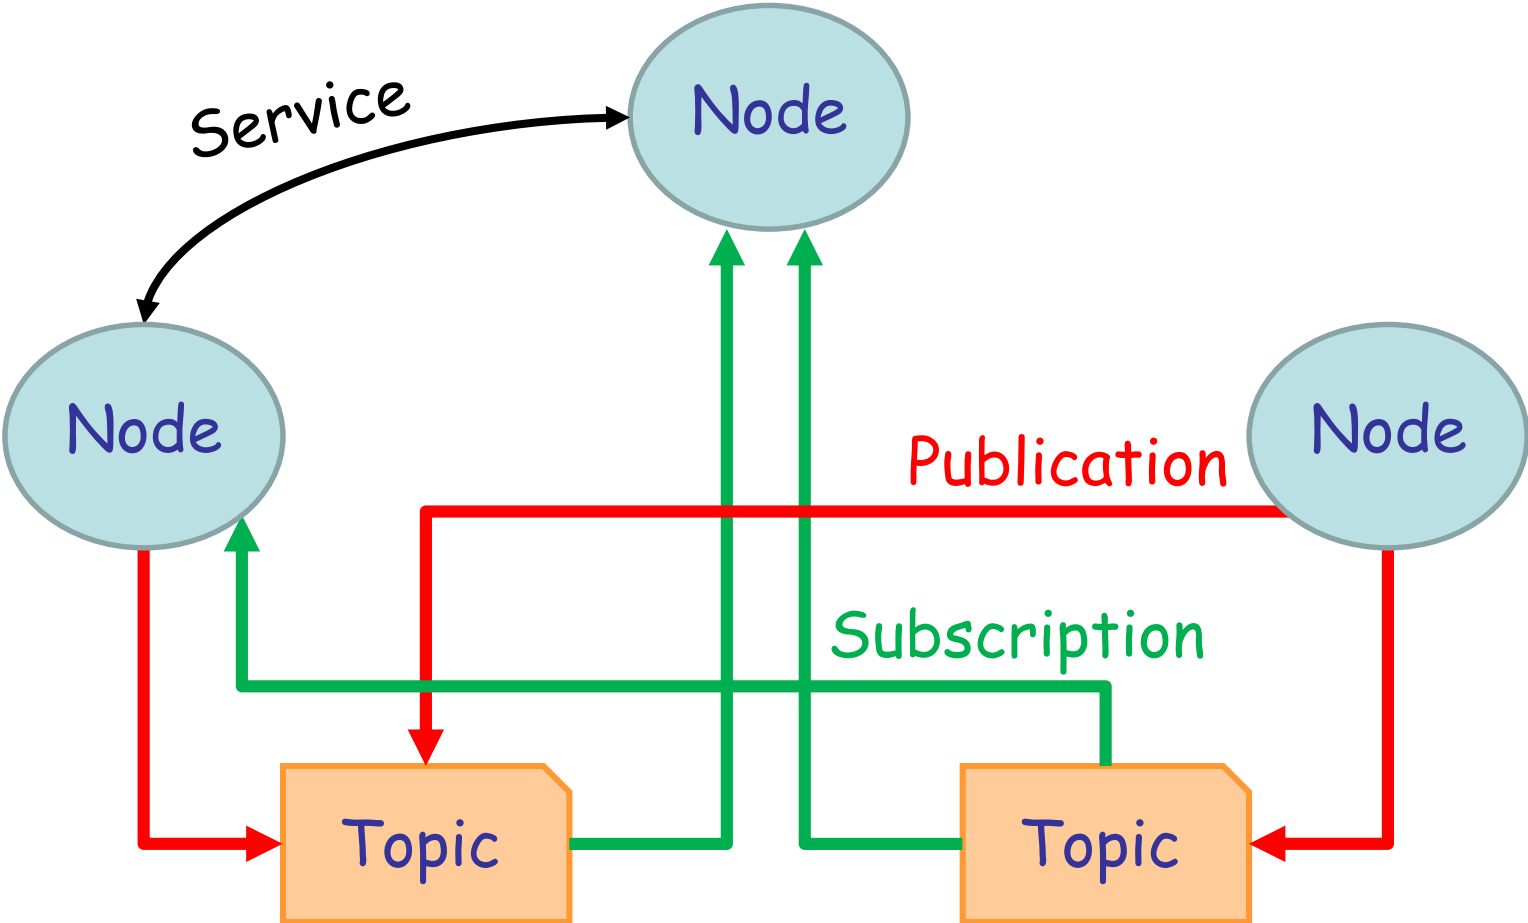



Node

- A process that performs computation
- Interchangeable with a software module
- Can generate data for and receive data from other nodes

A system is typically comprised of many nodes: robot control node, localization node, path planning node, perception node, etc.

Benefits of using nodes


- Fault-tolerance: crashes are isolated to individual nodes
- Reduction of code complexity

Topic

- Named bus over which nodes exchange messages
- Has anonymous publish/subscribe semantics.

A node can publish and/or subscribe to multiple topics.

A topic supports multiple publishers and subscribers.

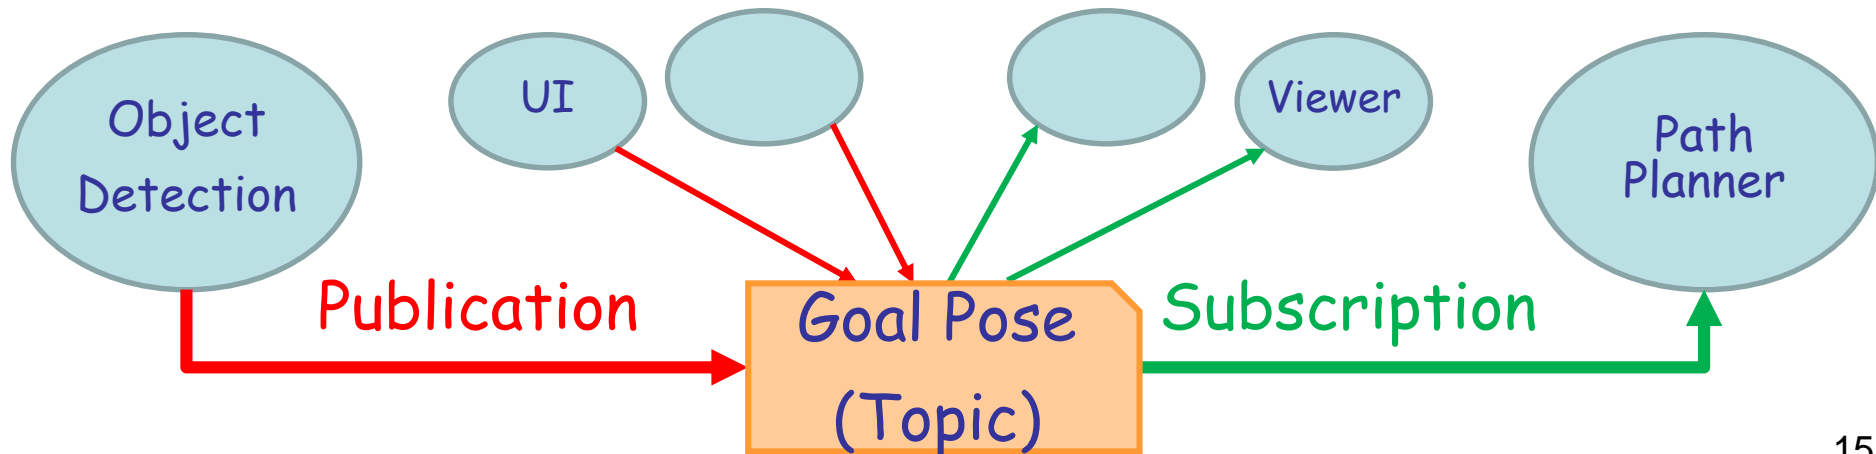



Message: Strictly typed data structure used for communication between nodes

Message description specification

- Build-in types
- Names of Messages defined on their own
- Fixed- or variable-length arrays:
- Header type: `std_msgs/Header`:
 `uint32 seq`, `time stamp`, `string frame_id`
- Constants

```
int16 x
uint32 y
sensor_msgs/LaserScan s
uint8[] data
float32[10] a
Header header
int32 z=123
string s=foo
```

Messages can be arbitrarily nested structures and arrays.



common_msgs

- Messages that are widely used by other ROS packages
- Provide a shared dependency to multiple stacks, eliminating a circular dependency

Types of common_msgs

- *geometry_msgs*: Point, Pose, Transform, Vector, Quaternion, etc.
- *nav_msgs*: MapMetaData, Odometry, Path, etc.
- *sensor_msgs*: LaserScan, PointCloud, Range, etc.



Service: A pair of strictly typed messages for **synchronous** transactions

Service description specification


- Request messages
- Response messages

```
int16 x
uint32 y
---
string s
```

Two messages are concatenated together with a '---'.


A service **cannot** be embedded inside another service.

Only one node can advertise a service of any particular name.

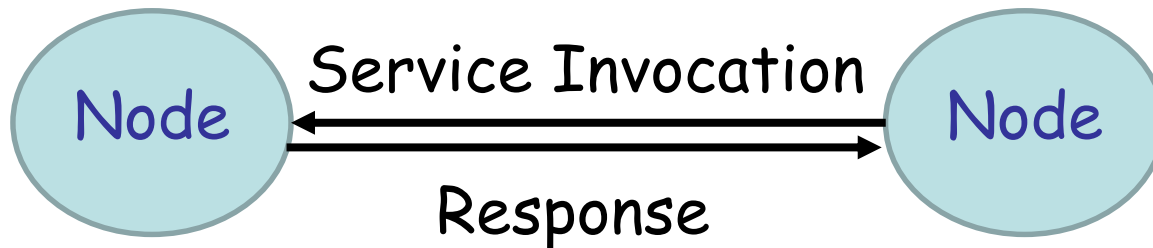

Master

- Provides naming and registration services to nodes
- Tracks publishers and subscribers to topics and services
- Enables individual nodes to locate one another

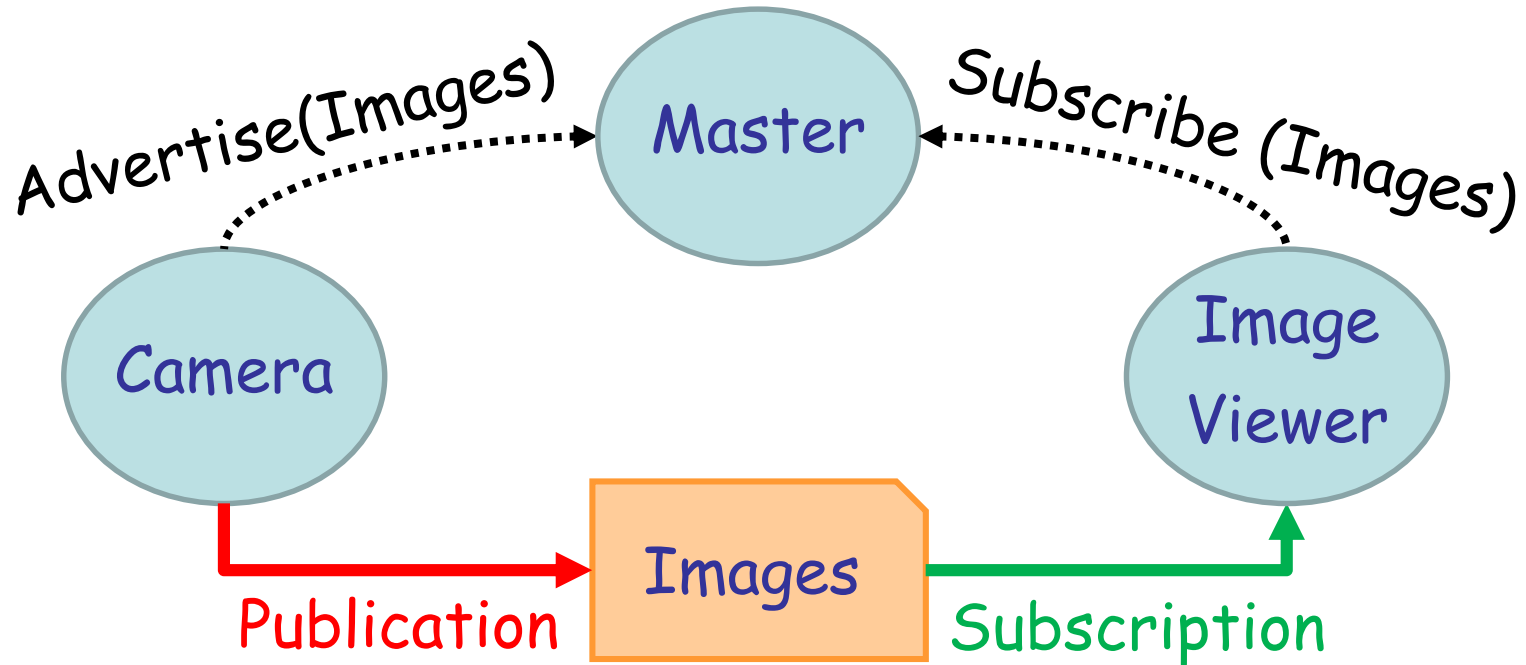




TCPROS

- Provides a simple, reliable communication stream
- TCP packets always arrive in order
- Lost packets are resent until they arrive.

UDPROS

- Packets can be lost, contain errors, or be duplicated.
- Is useful when multiple subscribers are grouped on a single subnet
- Is useful when latency is more important than reliability, e.g., teleoperation, audio streaming
- Suited for a lossy WiFi or cell modem connection.



ROS topic connection example

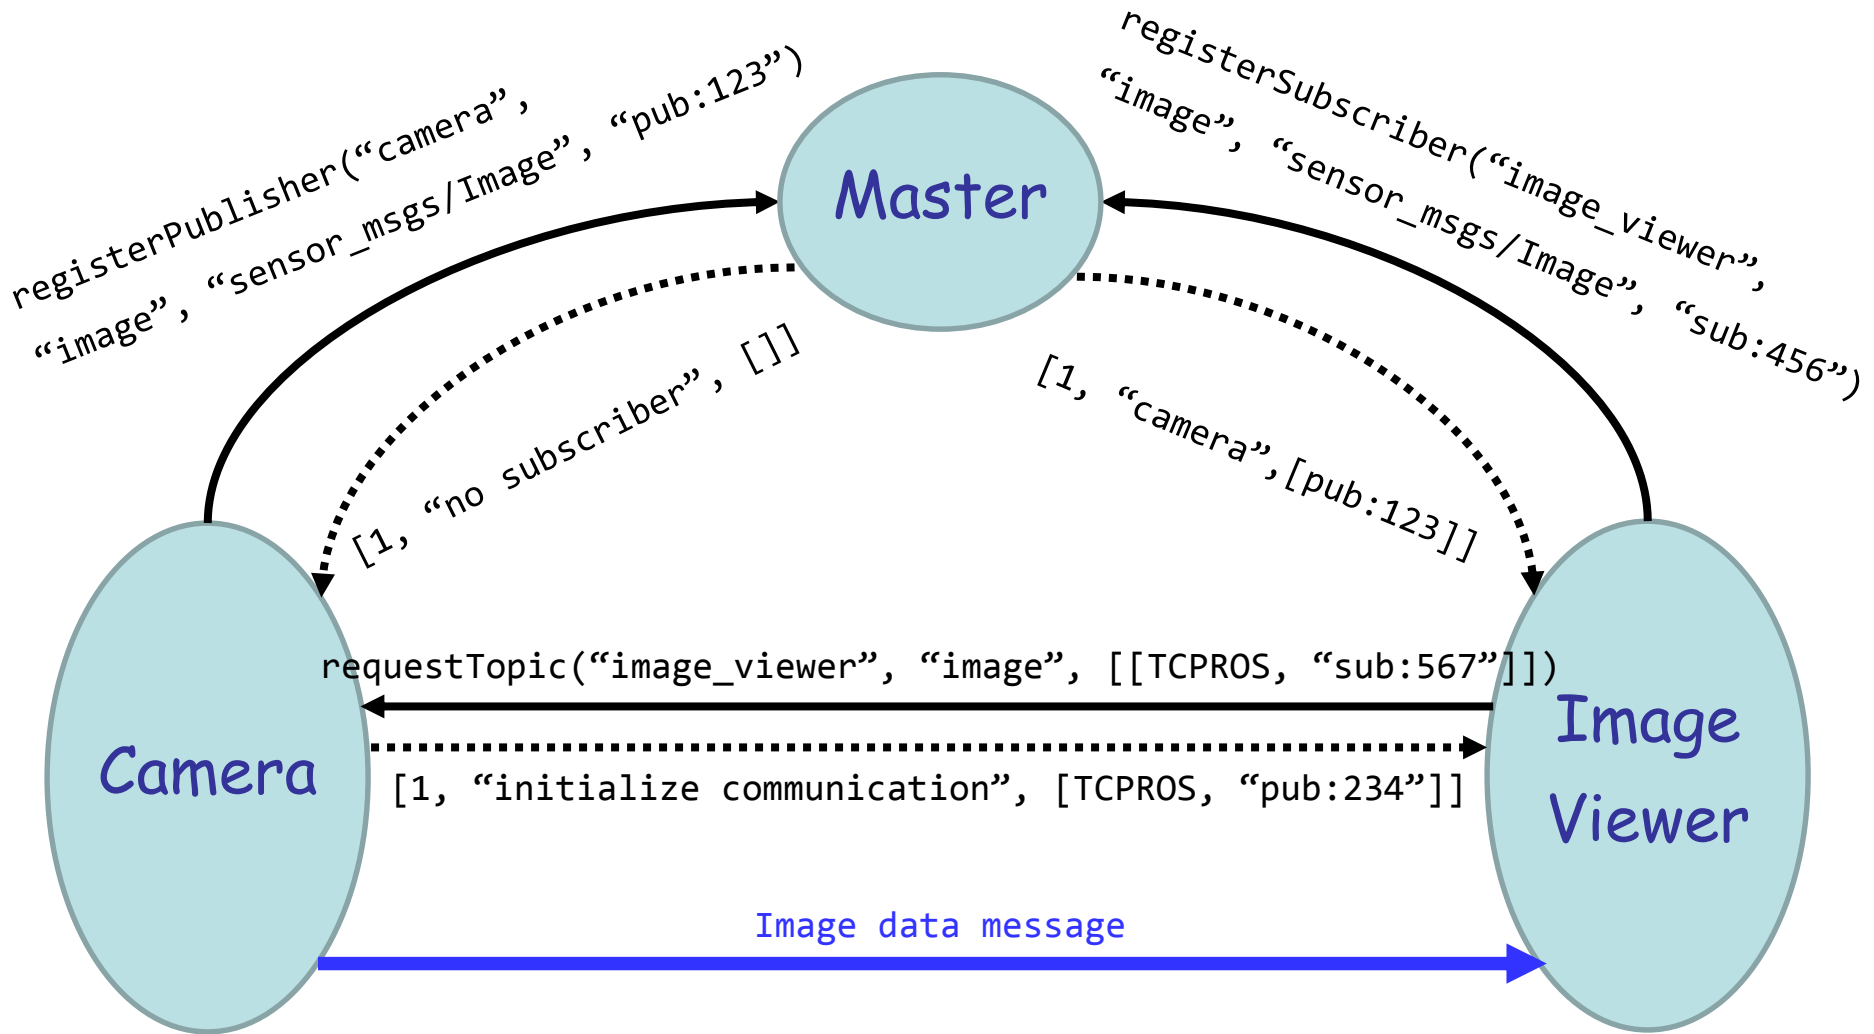

Package

- A software unit with useful functionality
- Aims to provide enough functionality to be useful but still lightweight and reusable in other software.
- Can contain ROS runtime processes (nodes), a ROS-dependent library, datasets, configuration files, etc.



Useful packages for the class

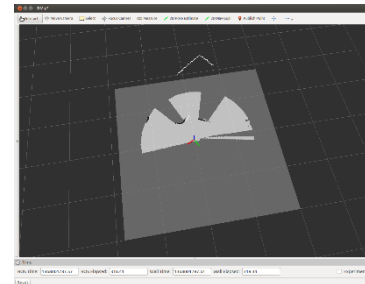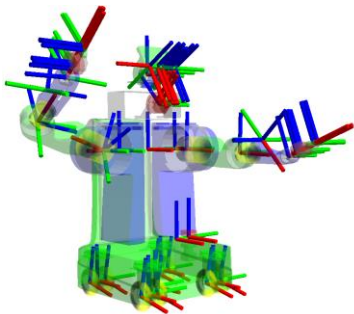

TF: coordinate transformation

RViz: 3D visualization

TF: Coordinate Transformation

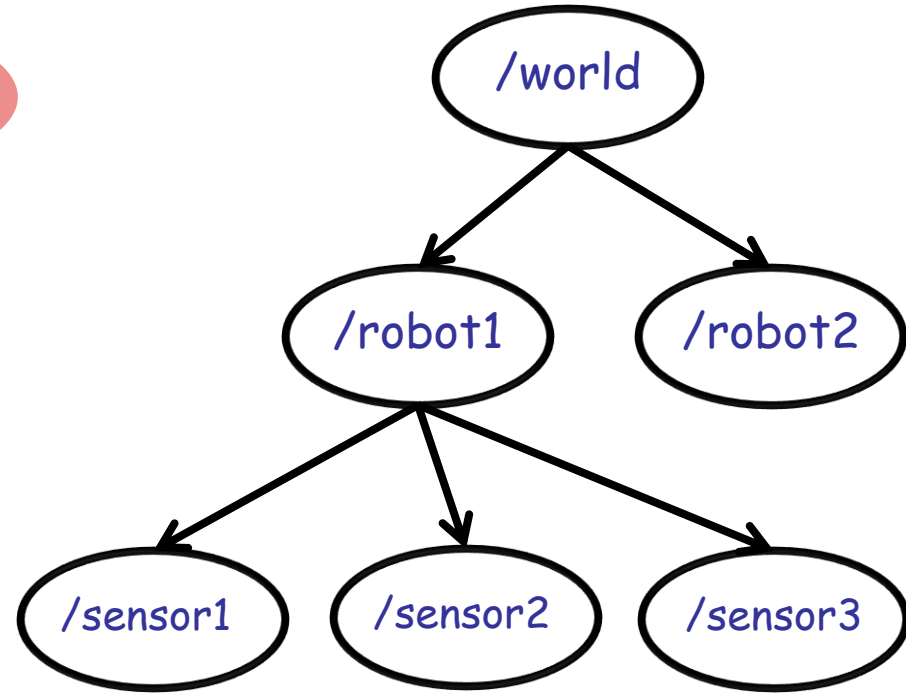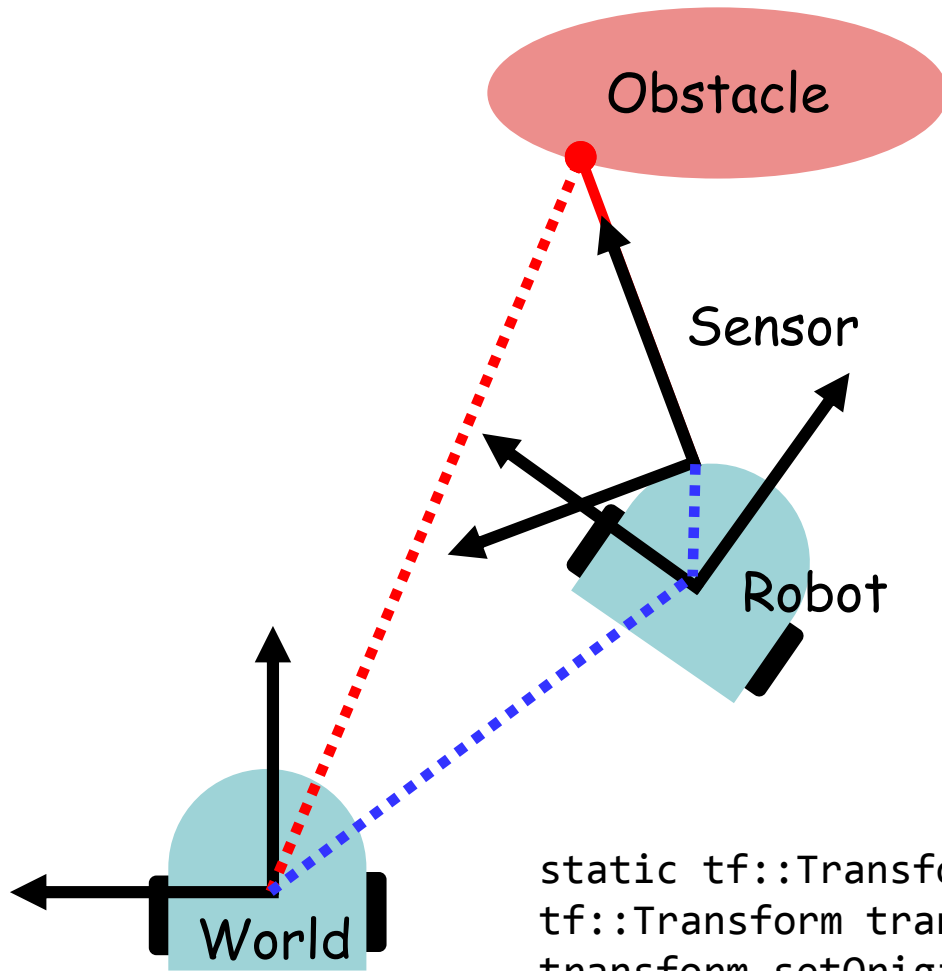

```
static tf::TransformBroadcaster br;  
tf::Transform transform;  
transform.setOrigin( tf::Vector3(x, y, 0.0) );  
transform.setRotation( tf::Quaternion(theta, 0, 0) );  
br.sendTransform(tf::StampedTransform(transform,  
ros::Time::now(), "world", "robot1");
```



- ROS publish/subscribe
- TF
- RViz



Axis orientation

- x : forward, y : left, z : up

Rotation representation

- Quaternion: x, y, z, w
 - Compact representation
 - No singularities
- Rotation matrix
 - No singularities
- roll: x , pitch: y , yaw: z
 - No ambiguity in order
 - Used for angular velocities



Standard SI units

Base Units		Derived Units	
Quantity	Unit	Quantity	Unit
Length	Meter	Angle	Radian
Mass	Kilogram	Frequency	Hertz
Time	Second	Force	Newton
Current	Ampere	Temperature	Celsius
		Power	Watt
		Voltage	Volt



Build system

- A software tool for automating program compilation, testing, etc.
- Maps a set of source code (files) to a target (executable program, library, generated script, exported interface)
- Must fully understand the build dependencies

CMake

- Cross-platform build system
- Controls the build process using a *CMakeLists.txt* file
- Creates native makefile in the target environment

```
cmake_minimum_required(VERSION 2.8.3)
project(ProjectName)
add_executable(ExecutableName file.cpp)
```



catkin

- Official build system of ROS
- CMake with some custom CMake macros and Python scripts
- Supports for automatic 'find package' infrastructure and building multiple, dependent projects at the same time
- Simplifies the build process of ROS's large, complex, and highly heterogeneous code ecosystem

Advantages of using catkin

- Portability through Python and pure CMake
- Independent of ROS and usable on non-ROS projects
- Out-of-source builds: can build targets to any folder

Dependency management: package.xml



```
<package>
  <name>foo</name>
  <version>1.2.3</version>
  <description>
    This package provides foo capability.
  </description>
  <maintainer email="me@ethz.ch">Me</maintainer>
  <license>BSD</license>

  <url>http://www.ethz.ch/foo</url>
  <author>Me</author>

  <buildtool_depend>catkin</buildtool_depend>
  <build_depend>roscpp</build_depend>
  <run_depend>roscpp</run_depend>
  <test_depend>python-mock</test_depend>
</package>
```

Required tags

Package's build system tools

Packages needed at build time

Packages needed at run time

Additional packages for unit testing

Dependency management: CMakeLists.txt



```
cmake_minimum_required(VERSION 2.8.3)           Minimum Cmake version

project(foo)                                    Project name

find_package(catkin REQUIRED COMPONENTS roscpp)  Dependent packages

catkin_package(                                Installs package.xml and generates code for find_package
  INCLUDE_DIRS include                        Include paths for the package
  LIBRARIES ${PROJECT_NAME}                  Exported libraries from the project
  CATKIN_DEPENDS roscpp                      Other catkin projects this project depends on
  DEPENDS opencv                             Non-catkin CMake projects this project depends on
)

include_directories(include ${catkin_INCLUDE_DIRS}) Location of header files

add_executable(foo src/foo.cpp)               An executable target to be built

add_library(moo src/moo.cpp)                  Libraries to be built

target_link_libraries(foo moo)                Libraries the executable target links against
```



Roboscoop

- Library (set of primitives and tools for their coordination)
- Integration with other robotics frameworks
- External calls

SCOOP

- O-O Structure
- Coordination
- Concurrency

ROS

- Communication
- Navigation, image processing, coordinate transforms, visualization, ...




Simple Concurrent Object Oriented Programming

- Easy parallelization
- One more keyword in Eiffel (**separate**)
- Natural addition to O-O framework
- Retains natural modes of reasoning about programs
- Coordination is easy to express: close correspondence with behavioral specification^[1]

[1] Ramanathan, G. et al.: Deriving concurrent control software from behavioral specifications. IEEE/RSJ International Conference on Intelligent Robots and Systems, pages 1994-1999

Object and processor architecture

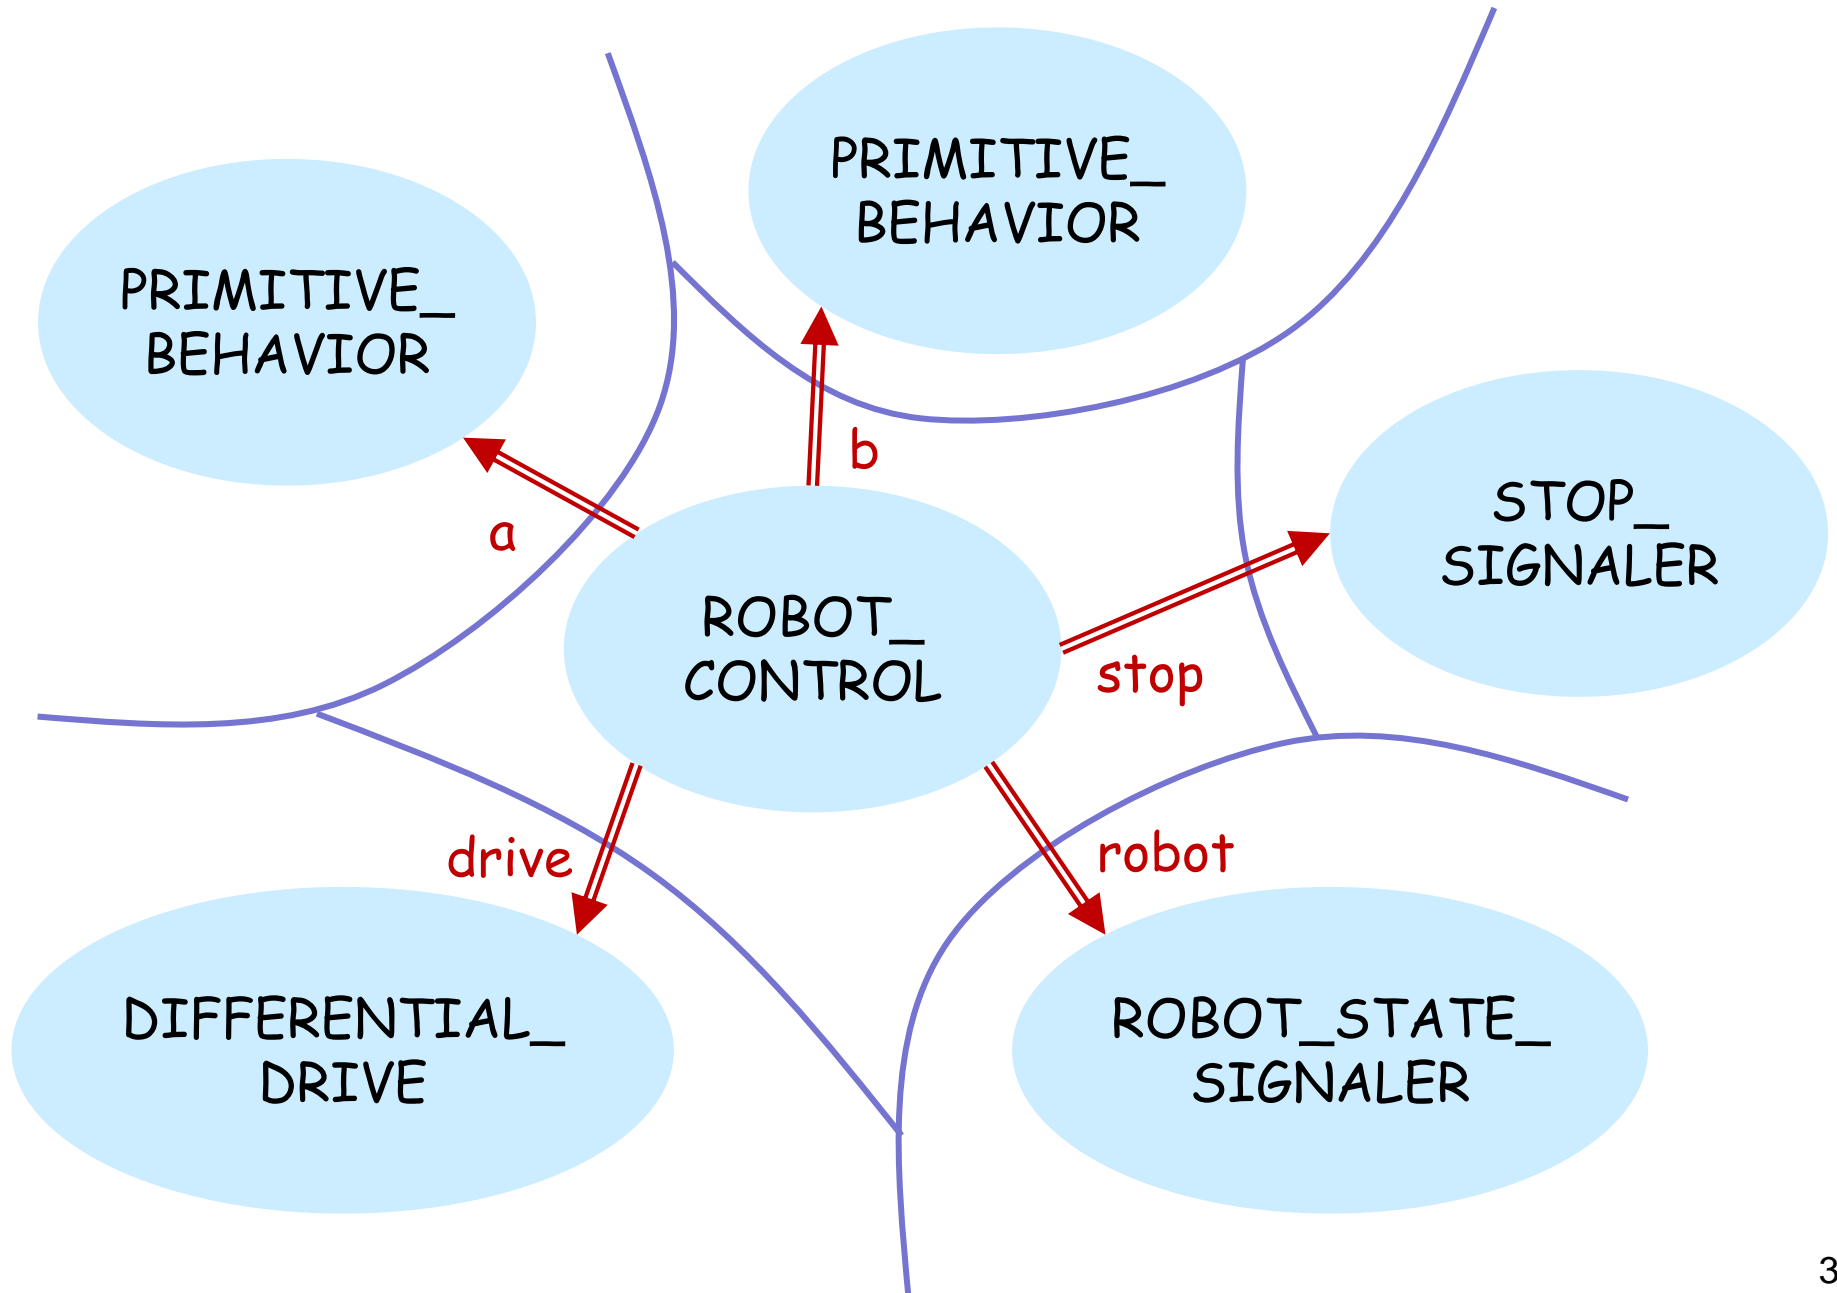

To go straight, to avoid obstacles ...



Get the state of the robot

- Location and orientation
- Linear and angular velocity
- Sensory information

Control the velocity

Stop if there is a request for stopping (e.g., emergency stop)

separate: objects are potentially on a different processor

r: **separate** ROBOT_STATE_SIGNALER

d: **separate** DIFFERENTIAL_DRIVE

s: **separate** STOP_SIGNALER



Obstacle

separate calls



feature

```
robot: separate ROBOT_STATE_SIGNALER -- Current robot's state
drive: separate DIFFERENTIAL_DRIVE -- Control robot's velocity
stop: separate STOP_SIGNALER -- Whether stop requested
```

```
start -- Start the control
  local
    a, b: separate PRIMITIVE_BEHAVIOR
  do
    create a.make (stop)
    create b.make (stop)
    start_robot_behaviors (a, b)
  end
```


```
start_robot_behaviors (a, b: separate PRIMITIVE_BEHAVIOR)
  do
    a.repeat_until_stop_requested (
      agent a.avoid_obstacle (robot, drive, stop))
    b.repeat_until_stop_requested (
      agent b.go_straight (robot, drive, stop))
  end
```

Synchronization through preconditions



```
go_straight (a_robot: separate ROBOT_STATE_SIGNALER;  
            a_drive: separate DIFFERENTIAL_DRIVE;  
            a_stop: separate STOP_SIGNALER)  
    -- Move robot unless stopped or an obstacle observed.  
require  
    (not a_robot.is_moving and not a_robot.has_obstacle)  
or a_stop.is_stop_requested  
do  
    if a_stop.is_stop_requested then  
        a_drive.stop  
    else  
        a_drive.send_velocity (0.03, 0.0) -- 3cm/sec, no spinning  
    end  
end
```

How do we cancel all processors?

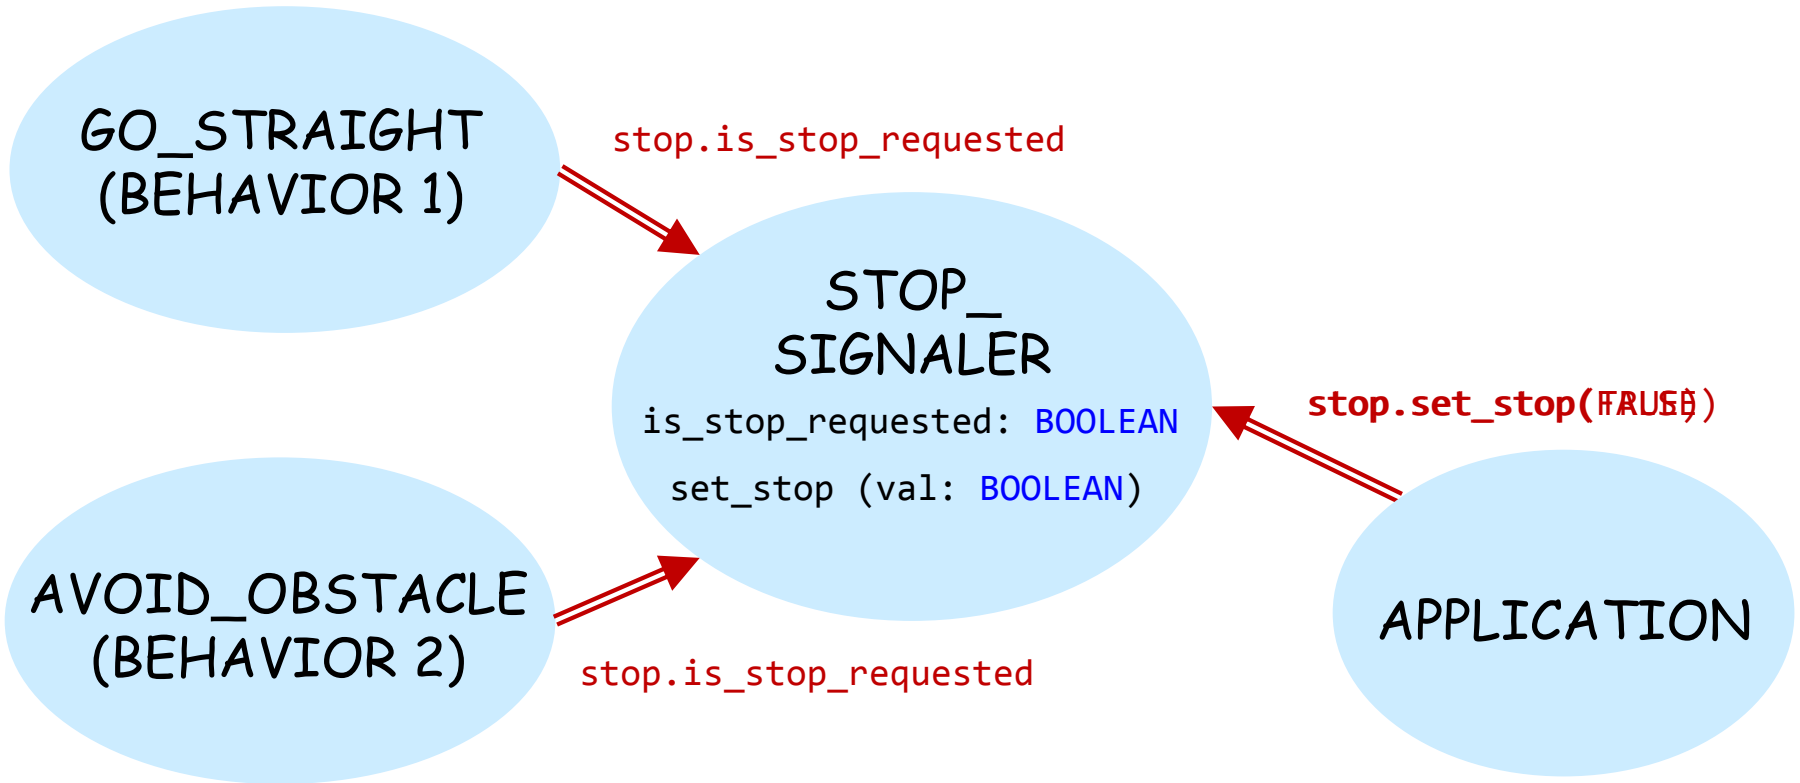



Coordination layer above *SCOOP*

Three-layer architecture

Synchronization: wait conditions

Interoperability through ROS (external calls)

Roboscoop repository structure



roboscoop_app

application.e

controller

...

roboscoop_lib

controller

sequencer

sensor

common

utils

signaler

ros

msgs


actuator

roboscoop_ros

msg

src

Communication with ROS nodes: publication

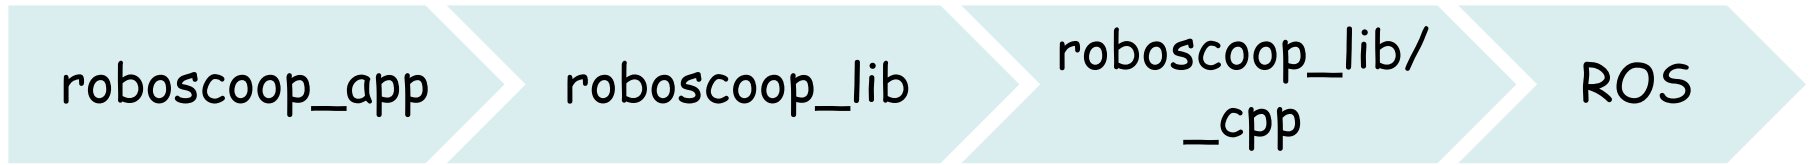

Topic name:
/aseba/events/sound_cmd

ROS_PUBLISHER
ASEBA_MSG


publisher.h

Message type:
asebaros/AsebaEvent

```
time stamp
uint16 source
int16[] data
```

```
pub: ROS_PUBLISHER[ASEBA_MSG]
msg: ASEBA_MSG
create msg.make_with_two_values (0, sound_id)
create pub.make_with_topic ("/aseba/events/sound_cmd")
...
pub.publish (msg)
```


Communication with ROS nodes: subscription

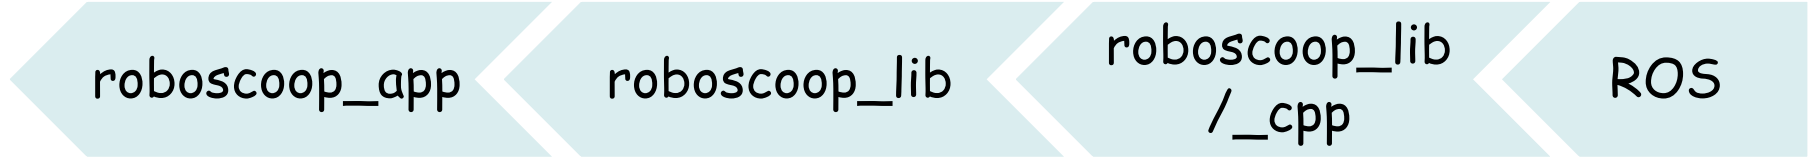

ROS_SUBSCRIBER
ODOMETRY_MSG

subscriber.h

Topic name:
/thymio_driver/odometry

Message type:
nav_msgs/Odometry

```
Header header
string child_frame_id
PoseWithCovariance pose
TwistWithCovariance twist
```

```
sub: ROS_SUBSCRIBER[ODOMETRY_MSG]
sig: ODOMETRY_SIGNALER
```

```
create sub.make
```

...

```
-- inside a wrapper
```

```
sub.subscribe (“/thymio_driver/odometry”,
               agent a_sig.update_odometry)
```

Communication with ROS nodes: application



```
class YOUR_APPLICATION feature
```

```
  thymio: separate THYMIO_ROBOT           -- The robot.  
  ros_spinner: separate ROS_SPINNER      -- ROS spinner object for communication.
```

```
  some_feature
```

```
    local
```

```
      robo_node: separate ROBOSCOOP_NODE
```

```
    do
```

```
      -- Initialize this application as a ROS node.
```

```
      robo_node := (create {ROS_NODE_STARTER}).roboscoop_node
```

```
      -- Create a robot object.
```

```
      create thymio.make
```

```
      -- Listen to ROS.
```

```
      create ros_spinner.make
```

```
      start_spin (ros_spinner)
```

```
      -- Launch Thymio.
```

```
      launch_robot (thymio)
```

```
    end
```