



Part 1: Language constructs

1.3 EXCEPTION HANDLING

Java: Exception Handling



```
public class Printer {  
    public print(int i) {  
        try {  
            throw new Exception()  
        }  
        catch(Exception e) { }  
    }  
}
```

Eiffel: Exception Handling

```
class
  PRINTER
feature
  print_int (a_int: INTEGER)
    local
      l_retried: BOOLEAN
    do
      if not l_retried then
        (create {DEVELOPER_EXCEPTI
      else
        -- Do something
      end
    rescue
      l_retried := True
    retry
  end
end
```

- EXCEPTION
 - ASSERTION_VIOLATION
 - CHECK_VIOLATION
 - INVARIANT_VIOLATION
 - LOOP_INVARIANT_VIOLATION
 - POSTCONDITION_VIOLATION
 - PRECONDITION_VIOLATION
 - VARIANT_VIOLATION
 - DEVELOPER_EXCEPTION
 - MACHINE_EXCEPTION
 - HARDWARE_EXCEPTION
 - FLOATING_POINT_FAILURE
 - OPERATING_SYSTEM_EXCEPTION
 - COM_FAILURE
 - OPERATING_SYSTEM_FAILURE
 - OPERATING_SYSTEM_SIGNAL_FAILURE
 - OBSOLETE_EXCEPTION
 - EXCEPTION_IN_SIGNAL_HANDLER_FAILURE
 - RESCUE_FAILURE
 - RESUMPTION_FAILURE
 - SYS_EXCEPTION
 - EIFFEL_RUNTIME_PANIC
 - EIF_EXCEPTION
 - EIFFEL_RUNTIME_EXCEPTION
 - DATA_EXCEPTION
 - IO_FAILURE
 - MISMATCH_FAILURE
 - SERIALIZATION_FAILURE
 - EXTERNAL_FAILURE
 - NO_MORE_MEMORY
 - LANGUAGE_EXCEPTION
 - BAD_INSPECT_VALUE
 - EIFFELSTUDIO_SPECIFIC_LANGUAGE_EXCEPTION
 - ADDRESS_APPLIED_TO_MELTED_FEATURE
 - CREATE_ON_DEFERRED
 - ROUTINE_FAILURE
 - VOID_ASSIGNED_TO_EXPANDED
 - VOID_TARGET
 - OLD_VIOLATION

Eiffel: retry example



feature

transmit (a_p: PACKET)
-- transmit packet a_p

local

l_current_retries: INTEGER
r: RANDOM_NUMBER_GENERATOR

do

line.send (a_p)

rescue

if *l_current_retries* < *max_retries* **then**

r.next

wait_millisecs (r.value_between(20, 50))

current_retries := current_retries + 1

retry

end

end

end

Part 1: Language constructs

1.4 ONCE ROUTINES

What are once routines?

```
foo: INTEGER
```

```
once
```

```
    Result := factorial (10)
```

```
end
```

```
test_foo
```

```
do
```

```
    io.put_integer (foo) -- 3628800, calculated
```

```
    io.put_integer (foo) -- 3628800, directly returned
```

```
end
```

- Executed the first time only, subsequent calls have no effect
- If routine is a function, *Result* is stored and returned in subsequent calls
- Similar to singleton pattern



Use of once routines

- Constants, other than basic types

i: COMPLEX

once create *Result.make (0, 1)* end

- Lazy initialization

settings: SETTINGS

once create *Result.load_from_filesystem* end

- Initialization procedures

init_graphics_system

once ... end

Part 1: Language constructs

1.5 STYLE RULES



Style rule

For indentation, use tabs, not spaces



Tabs

```
class
  PREVIEW

inherit
  TOURISM

feature
  explore
    -- Show city info
    -- and route.

    do
      Paris.display
      Louvre.spotlight
      Line8.highlight
      Route1.animate
    end
  end
end
```

More style rules



- Class name: all upper-case
Full words, no abbreviations
(with some exceptions)
- Classes have global namespace: two classes cannot have the same name (even in different clusters)
- Usually, classes are prefixed with a library prefix

EiffelVision2: EV_

Base is not prefixed

```
class
  PREVIEW
inherit
  TOURISM

feature
  explore
    -- Show city info
    -- and route.
  do
    Paris.display

    Louvre.spotlight
    Line8.highlight
    Route1.animate
  end
end
```



Even more style rules

- For feature names, use full words, not abbreviations
- Always choose identifiers that clearly identify the intended role
- Use words from natural language (preferably English) for the names you define
- For multi-word identifiers, use underscores

```
class
  PREVIEW
inherit
  TOURISM
feature
  explore
    -- Show city info
    -- and route.
  do
    Paris.display
    Louvre.spotlight
    Line8.highlight
    Line8.remove_all_sections
    Route1.animate
  end
end
```



Eiffel Naming: Locals / Arguments



- Locals and arguments share namespace with features
 - Name clashes arise when a feature is introduced, which has the same name as a local (even in parent)
- To prevent name clashes:
 - Locals are prefixed with **l_**
 - Some exceptions like “i” exist
 - Arguments are prefixed with **a_**

Part 1: Language constructs

1.6 GENERICS



Declaring generics

class

MY_QUEUE [G]

feature

item: G

-- First item in queue.

do ... end

extend (a_element: G)

-- Add new element.

do ... end

end



G is called the generic parameter. By convention, the generic parameter name is G. If there are more parameters, use G, H, etc. or a meaningful abbreviation such as K for keys in a hash table

Creating instances of generics classes



class

EXAMPLE1

feature

int_queue

-- An integer queue.

local

qi: MY_QUEUE [INTEGER]

do

create qi

qi.extend (35)

qi.extend (6)

end

end

class

EXAMPLE2

feature

string_queue

-- A string queue.

local

qs: MY_QUEUE [STRING]

do

create qs

qs.extend ("Asterix")

qs.extend ("Obelix")

qs.extend ("Suffix")

end

end

Constraint generics



class

MY_LIST [G -> COMPARABLE]

feature

item: G

-- First item in queue.

do ... end

extend (a_element: G)

-- Add new element.

do

... **if a_element < item then**

...

end

end

The generic parameter G must be a class inheriting from COMPARABLE



Creating instances of constraint generics classes




-- Valid declarations

```
li: MY_LIST [INTEGER]  
ls: MY_LIST [STRING]  
lr: MY_LIST [REAL]  
ld: MY_LIST [DOUBLE]  
...
```

-- Invalid declarations


```
la: MY_LIST [ACCOUNT]  
lb: MY_LIST [BANK]  
lm: MY_LIST [MAIN]  
...
```

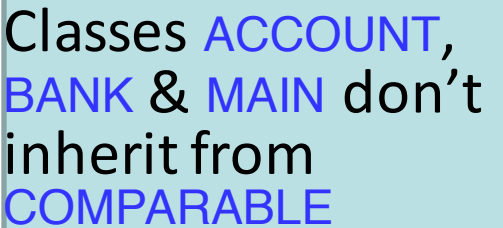

Classes ACCOUNT,
BANK & MAIN don't
inherit from
COMPARABLE

Part 1: Language constructs

1.8 INFORMATION HIDING

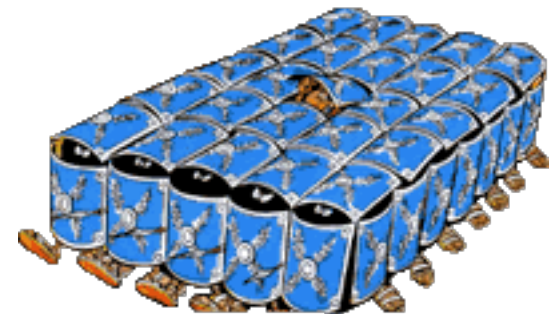

Two kinds of routine

Procedure: doesn't return a result

- Yields a **command**
- Calls are **instructions**

Function: returns a result

$f(\text{arg} : \text{TYPE}; \dots):$ **RESULT_TYPE**

... (The rest as before) ...


- Yields a **query**
- Calls are **expressions**

Features: the full story



*Client view
(specification)*

*Internal view
(implementation)*

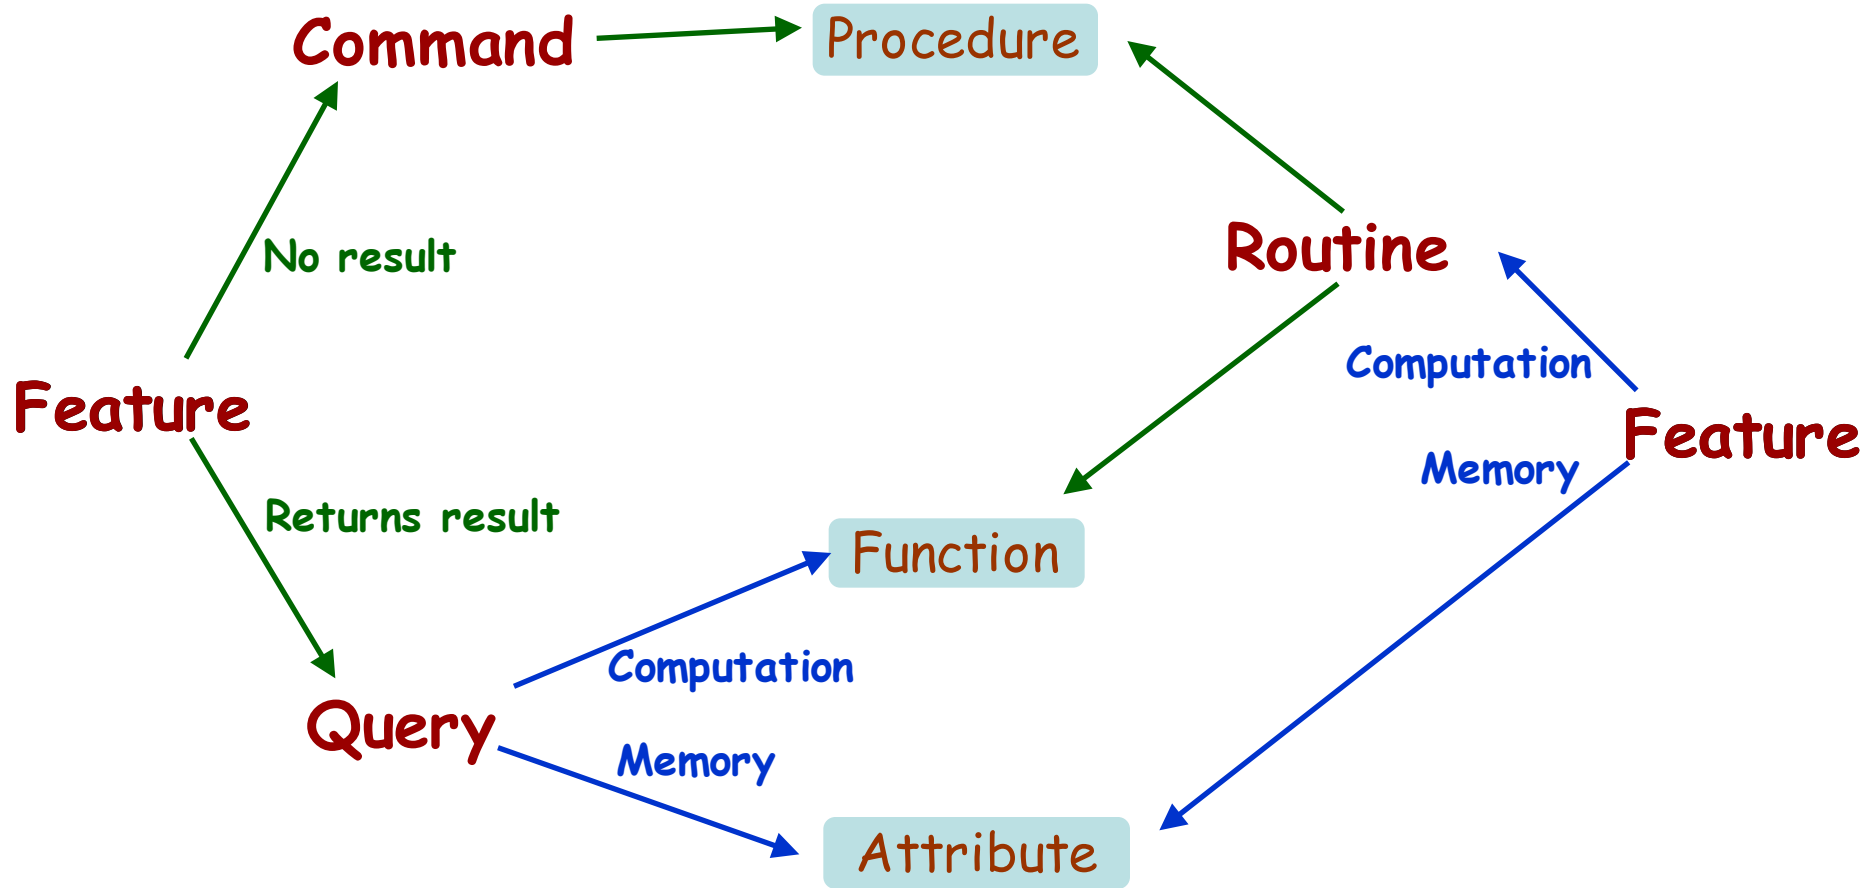

The Uniform Access principle




It doesn't matter to the client whether you look up or compute



Uniform Access: an example

$balance = list_of_deposits.total - list_of_withdrawals.total$

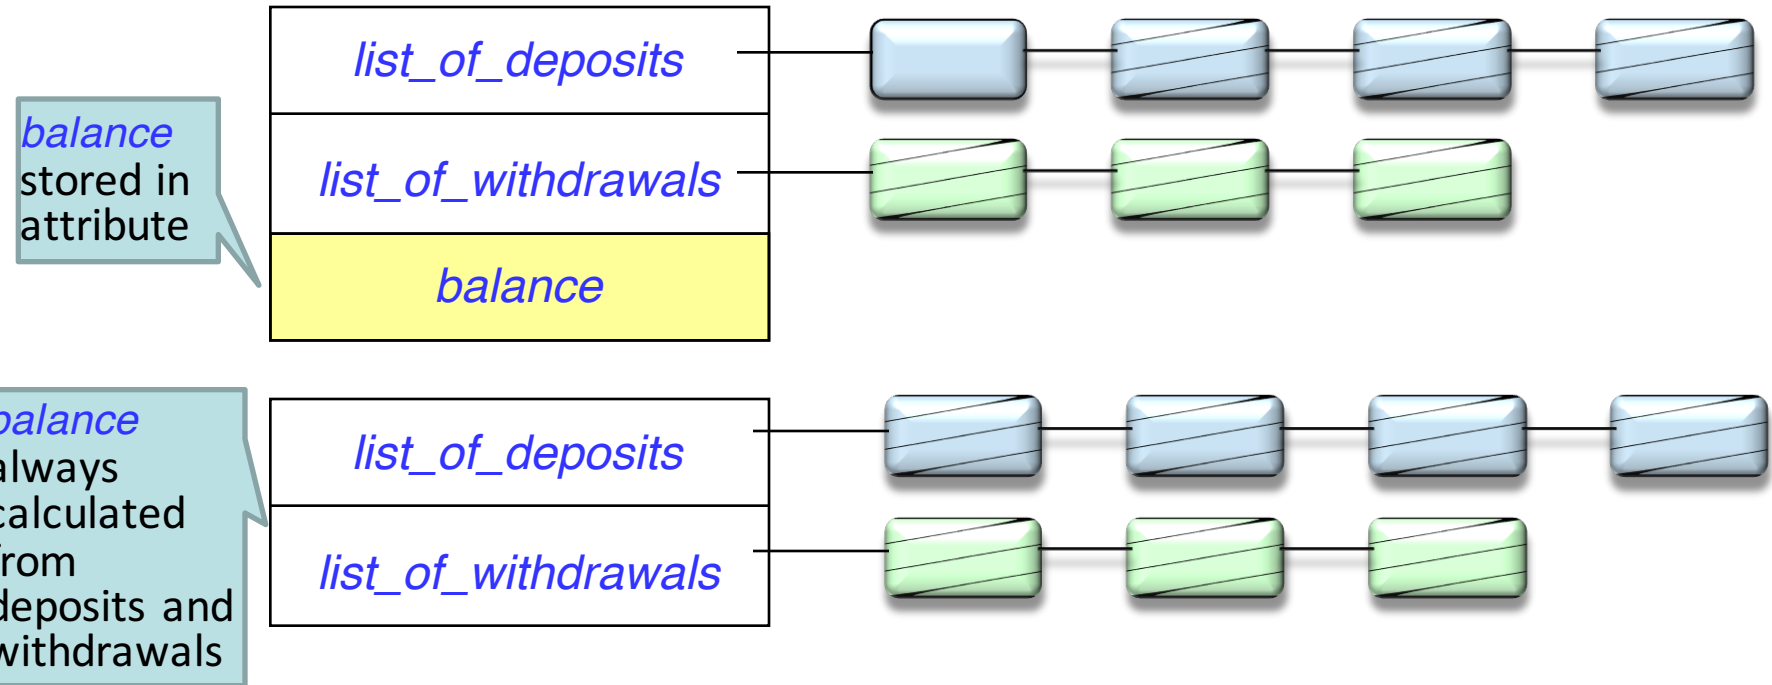

A call such as
your_account.balance
could use an attribute or a function

Exporting (making public) an attribute



In Eiffel, exporting an attribute means exporting it **read-only**

From the outside, it is not shown as an attribute, just as a **query**: it could be a function

In contrast: in C++, Java & C#, if you make an attribute* x public, it is available for both read and write:

➤ $v := a1.x$

➤ $a1.x := v$

As a result, it is almost always a bad idea to export an attribute.

* (field, member variable)

Getter functions



In C++, Java & C#, the standard technique, if *private_x* is secret, is to export an associated **getter function**:

```
x: T
  do
    Result := private_x
  end
```

Eiffel needs no getter functions: just export the attribute

This is safe: the attribute is exported

- Only for reading
- **Without the information that it is an attribute: it could be a function (Uniform Access principle)**


```
class  
  A
```

```
  feature
```

```
    f ...  
    g ...
```

```
  feature {NONE}
```

```
    h, i ...
```

```
  feature {B, C}
```

```
    j, k, l ...
```

```
  feature {A, B, C}
```

```
    m, n ...
```

```
end
```

Status of calls in a client with *a1:A*:

- *a1.f*, *a1.g*: valid in any client
- *a1.h*: **invalid** everywhere
(including in *A*'s own text!)
- *a1.j*: valid only in *B*, *C* and their descendants
(not valid in *A*!)
- *a1.m*: valid in *B*, *C* and their descendants,
as well as in *A* and its descendants

Information hiding



Information hiding only applies to use by clients, i.e. using dot notation or infix notation, as with *a1.f* (**Qualified** calls).

Unqualified calls (within class) not subject to information hiding:

```
class A feature {NONE}
  h do ... end
feature
  f
  do
    ...; h; ...
  end
end
```



PART 2: CONTRACTS

A contract is a semantic condition characterizing usage properties of a class or a feature

Three principal kinds:

- Precondition
- Postcondition
- Class invariant

Design by Contract



Together with the implementation (“*how*”) of each software element, describe “*what*” it is supposed to do: its contract

Three basic questions about every software element:

➤ What does it assume?

➤ What does it guarantee?

➤ What does it maintain?



Precondition



Postcondition



Invariant

Contracts in programming languages



Eiffel: integrated in the language

Java: Java Modeling Language (JML), iContract etc.

.Net languages: Code Contracts (a library)

Spec# (Microsoft Research extension of C#): integrated in the language

UML: Object Constraint Language

etc.

Property that a feature imposes on every client:

```
factorial (i: INTEGER): INTEGER
  require
    valid_arg: i >= 0
  do
    ...
  end
```



A feature with no **require** clause is always applicable, as if it had

```
require
  always_OK: True
```

A client calling a feature must make sure that the **precondition** holds before the call

A client that calls a feature without satisfying its precondition is faulty (**buggy**) software.

Another example:

```
extend (a_element: G)
  require
    valid_elem: a_element /= void
    not_full: not is_full
  do ... end
```

A feature with a **require** clause

require

label_1: cond_1

label_2: cond_2 ...


label_n: cond_n

is equivalent to

require

label: cond_1 and cond_2 and ... cond_n



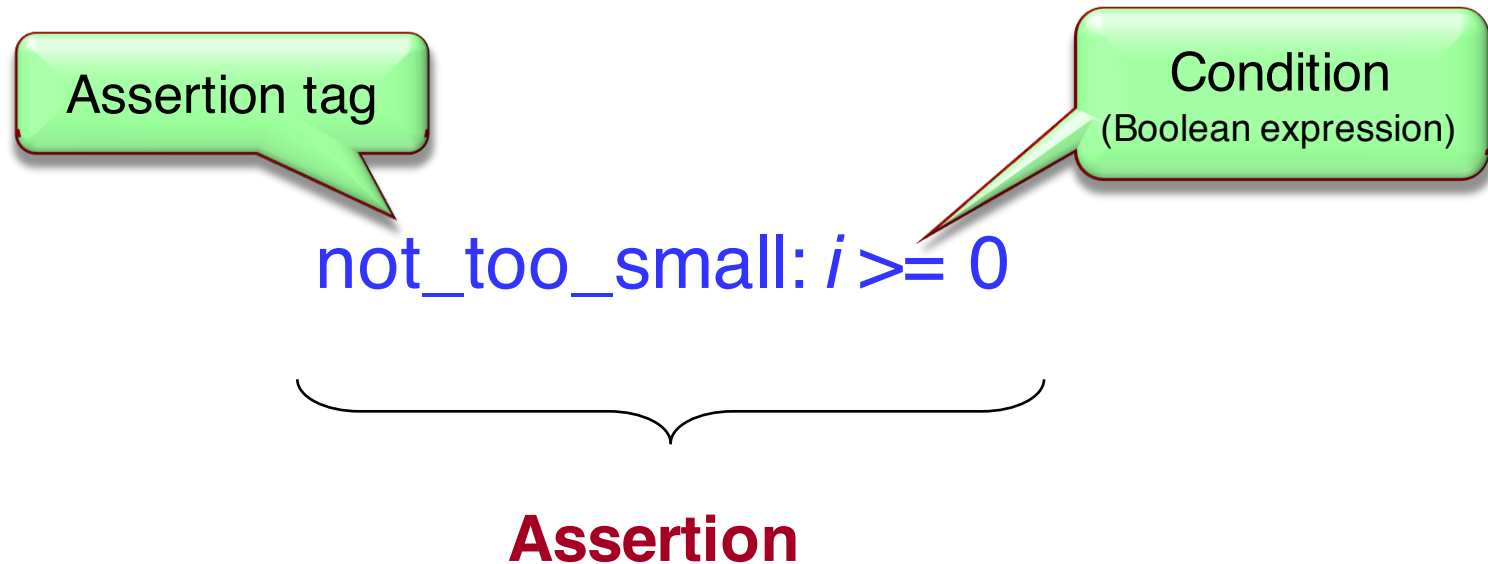

Let's code...



Go to:

<https://codeboard.io/projects/9137>

Task: in class **CUSTOMER**, write a precondition for the creation routine `make_with_name_and_age`

Task: create an invalid **CUSTOMER** object and try to run your program. What happens?

Task: fix your **CUSTOMER** object to satisfy the precondition of the creation routine

Postconditions

Precondition: obligation for clients

Postcondition: benefit for clients

extend (a_element: G)

ensure

inserted: i_th (count) = a_element

index (a_element: G): INTEGER

ensure

exists: **result** > 0 **implies** i_th (**result**) = a_element

no_exists: **result** = -1 **implies not** is_inserted (a_element)



Let's code...



Go to:

<https://codeboard.io/projects/9137>

Task: in class **CUSTOMER**, write a postcondition for the creation routine `make_with_name_and_age`

Task: modify the implementation of `make_with_name_and_age` such that it breaks your postcondition. Run the program. What happens?

Old notation



Usable in postconditions only

Denotes value of an expression as it was on routine entry

Example (in a class **ACCOUNT**):

```
balance : INTEGER
```

```
-- Current balance.
```

```
deposit (v : INTEGER)
```

```
-- Add v to account.
```

```
require
```

```
  positive:  $v > 0$ 
```

```
do
```

```
  ...
```

```
ensure
```

```
  added:  $balance = \mathbf{old} \text{ } balance + v$ 
```

```
end
```

Postcondition principle

A feature must make sure that, if its precondition held at the beginning of its execution, its postcondition will hold at the end.

A feature that fails to ensure its postcondition is buggy software.



Invariant



An invariant states properties about an object that are true

- **after** the object has been initialized
- **before and after** every routine call
(but not necessarily in between a call)

The invariant is listed after the last feature block.

A class with no **invariant** is the same as a
invariant
always_OK: True

Example (from class **ARRAY**):

invariant

area_exists: area /= Void
consistent_size: capacity = upper - lower + 1
non_negative_count: count >= 0
index_set_has_same_count: valid_index_set

A class with contracts



```
class
  BANK_ACCOUNT
create
  make
feature
  make (n : STRING)
    -- Set up with name n

    require
      n /= Void

    do
      name := n
      balance := 0

      ensure
        name = n
    end
end
```

```
  name : STRING
  balance : INTEGER
  deposit ( v : INTEGER)
    -- Add amount v
  do
    balance := balance + v
  ensure
    balance = old balance + v
  end

  invariant
    name /= Void
    balance >= 0
end
```


Let's code...

Go to:

<https://codeboard.io/projects/9137>

Task: in class **ACCOUNT**, replace all
-- Important: ...
comments with contracts



Contracts and inheritance (Example)

```
class
  ACCOUNT_MANAGER

feature -- Operations

  init_new_account(a_acc: ACCOUNT)

do
  -- do all initialization
  a_acc.set_balance(0)
end
```

```
class
  ACCOUNT

feature -- Operations


  set_balance(a_balance: DOUBLE)
  require
    non_neg: a_balance >= 0
  do
    balance := a_balance
  end
```

Must not strengthen precondition because of polymorphism and dynamic binding.

```
class
  SPECIAL_ACCOUNT
inherit
  ACCOUNT redefine set_balance end

feature -- Operations

  set_balance(a_balance: DOUBLE)
  require
    min_bal: a_balance > 100
  do
    balance := a_balance
  end
```

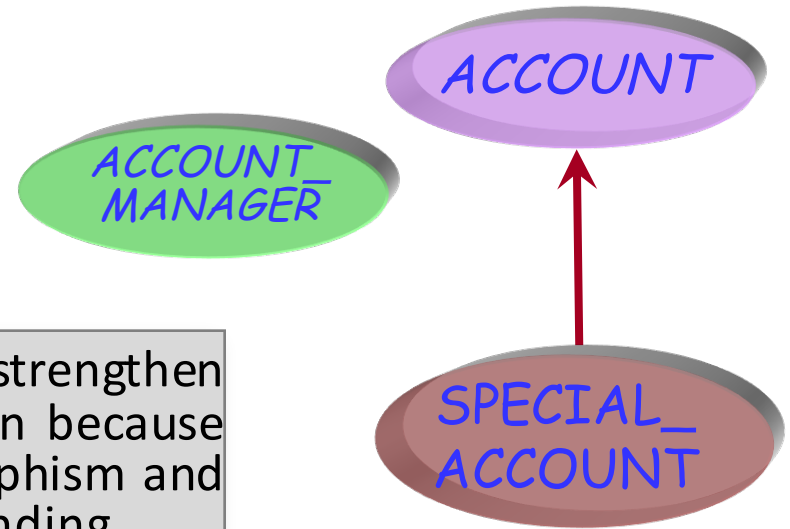

When redeclaring a routine, we may only:

Keep or weaken the precondition

Keep or strengthen the postcondition

Invariant Inheritance rule:

The invariant of a class automatically includes the invariant clauses from all its parents,

“and”-ed.



Assertion redeclaration rule in Eiffel



A simple language rule does the trick!

Redefined version may have nothing (assertions kept by default), or

```
require else new_pre  
ensure then new_post
```

Resulting assertions are:

- *original_precondition* **or** *new_pre*
- *original_postcondition* **and** *new_post*